


FOOD





LED	DESCRIPTION	STRENGHT POINTS
-----	-------------	-----------------



The fresher your food looks, the more appealing it is. LED luminaires show your produce in its best light, bringing out bright colors and textures you can almost taste.

Not only does the lighting entice customers to buy, but it enhances your overall store experience with clear visibility. Energy-efficient LEDs also help the environment, and reduce your payback time. Make the switch today.

Use the LED lighting as marketing tools to improve revenues and reduce energy bills
We have a full gamma products for each food type application.

- 65% ENERGY SAVING
- NO HEATING EFFECT
- DIMMABLE
- NO UV RADIATIONS & IR

MEAT LED TUBE



	MR-T8-10W600-N	MR-T8-15W1200-N	MR-T8-18W1200-N	MR-T8-22W1200-N	MR-T8-25W1200-N
Lamp Base	G13	G13	G13	G13	G13
Power	10W	15W	18W	22W	25W
Equivalent Power	18W	36W	36W	58W	58W
Power Factor	> 0.90	> 0.90	> 0.90	> 0.90	> 0.90
CCT (Range)	2800K ~ 3000K	2800K ~ 3000K	2800K ~ 3000K	2800K ~ 3000K	2800K ~ 3000K
Luminous Flux	1000lm - 1100lm	1600lm - 1700lm	1900lm - 2000lm	2400lm - 2500lm	2700lm - 2800lm
CRI (Ra)	>70 ; >80	>70 ; >80	>70 ; >80	>70 ; >80	>70 ; >80
Beam Angle	>120°	>120°	>120°	>120°	>120°
IP	IP20	IP20	IP20	IP20	IP20
Cover	Frost	Frost	Frost	Frost	Frost
Material	Aluminum, Polycarbonate PC	Aluminum, Polycarbonate PC	Aluminum, Polycarbonate PC	Aluminum, Polycarbonate PC	Aluminum, Polycarbonate PC

DIMENSIONS




	L (mm)
10W	588
15W	1198
18W	1198
22W	1498
25W	1498

INSTALLATION



TYPICAL PHOTOMETRIC CURVE

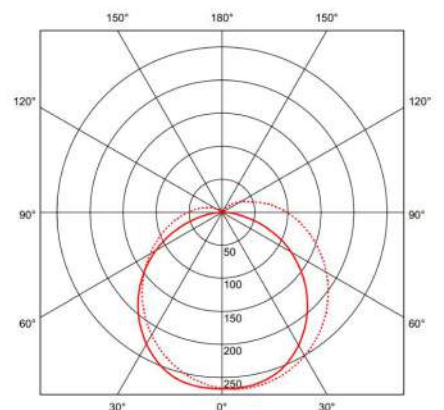

YELLOW HIGH BAY



	PG-HBF30W-YLW	PG-HBF40W-YLW	PG-HBF50W-YLW
Power	30W	40W	50W
Equivalent Power	60W	80W	100W
Power Factor	> 0.90	> 0.90	> 0.90
CCT (Range)	2700K	2700K	2700K
Luminous Flux	2400lm - 2600lm	3200lm - 3400lm	3400lm - 3800lm
CRI (Ra)	>90	>90	>90
Beam Angle	60°	60°	60°
IP	IP40	IP40	IP40
Reflector	Yellow	Yellow	Yellow
Food Installation	Bread	Bread	Bread


DIMENSIONS

	Diameter(mm)	Height(mm)
PG-HBF30W-YLW	290	376
PG-HBF40W-YLW	290	376
PG-HBF50W-YLW	290	376

INSTALLATION



TYPICAL PHOTOMETRIC CURVE

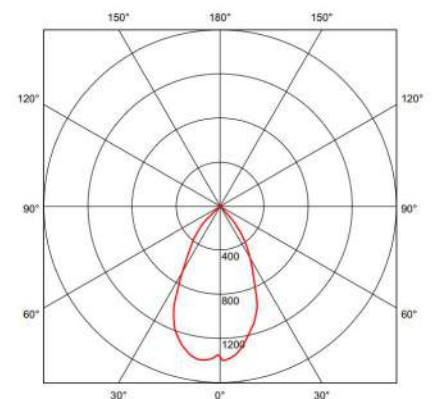

GREEN HIGH BAY



	PG-HBF30W-GRN	PG-HBF40W-GRN	PG-HBF50W-GRN
Power	30W	40W	50W
Equivalent Power	60W	80W	100W
Power Factor	> 0.90	> 0.90	> 0.90
CCT (Range)	3200K	3200K	3200K
Luminous Flux	2400lm - 2600lm	3200lm - 3400lm	3400lm - 3800lm
CRI (Ra)	>90	>90	>90
Beam Angle	60°	60°	60°
IP	IP40	IP40	IP40
Reflector	Green	Green	Green
Food Installation	Fruits and Vegetables	Fruits and Vegetables	Fruits and Vegetables


DIMENSIONS

	Diameter(mm)	Height(mm)
PG-HBF30W-YLW	290	376
PG-HBF40W-YLW	290	376
PG-HBF50W-YLW	290	376

INSTALLATION



TYPICAL PHOTOMETRIC CURVE

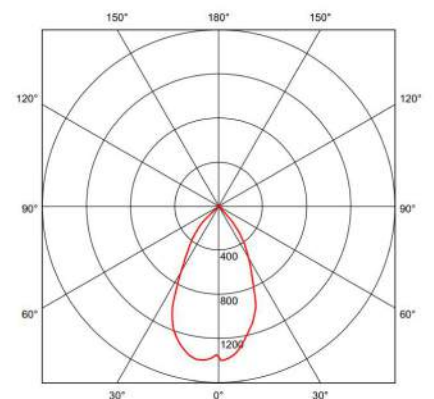

GRAY HIGH BAY



	PG-HBF30W-GRY	PG-HBF40W-GRY	PG-HBF50W-GRY
Power	30W	40W	50W
Equivalent Power	60W	80W	100W
Power Factor	> 0.90	> 0.90	> 0.90
CCT (Range)	5000K	5000K	5000K
Luminous Flux	2400lm - 2600lm	3200lm - 3400lm	3400lm - 3800lm
CRI (Ra)	>90	>90	>90
Beam Angle	60°	60°	60°
IP	IP40	IP40	IP40
Reflector	Gray	Gray	Gray
Food Installation	Fish	Fish	Fish


DIMENSIONS

	Diameter(mm)	Height(mm)
PG-HBF30W-YLW	335	380
PG-HBF40W-YLW	335	380
PG-HBF50W-YLW	335	380

INSTALLATION



TYPICAL PHOTOMETRIC CURVE

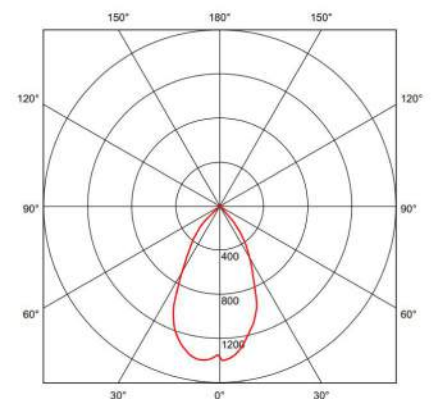

SPECIAL DOWNLIGHT



	PG-DL40W-M-150	PG-DL40W-B-150	PG-DL40W-C-150	PG-DL40W-M-175	PG-DL40W-B-175	PG-DL40W-C-175
Power	40W	40W	40W	40W	40W	40W
Equivalent Power	70W	70W	70W	70W	70W	70W
Power Factor	> 0.90	> 0.90	> 0.90	> 0.90	> 0.90	> 0.90
LED Chip	Sharp	Sharp	Sharp	Sharp	Sharp	Sharp
CCT (Range)	3000K	3000K	3000K	3000K	3000K	3000K
Luminous Flux	2900lm -3000lm	2900lm -3000lm	2900lm -3000lm	2900lm -3000lm	2900lm -3000lm	2900lm -3000lm
CRI (Ra)	90	96	90	90	96	90
Beam Angle	40°	40°	40°	40°	40°	40°
IP	IP20	IP20	IP20	IP20	IP20	IP20
Possible Rotation	20°	20°	20°	30°	30°	30°
Cover	Transparent	Transparent	Transparent	Transparent	Transparent	Transparent
Frame	White	White	White	White	White	White
Ideal Installation For	Meat	Bread	Clothes	Meat	Bread	Clothes


DIMENSIONS

	Hole D.(mm)	External D.(mm)	H(mm)
PG-DL40W-M-150	150	160	129,5
PG-DL40W-B-150	150	160	129,5
PG-DL40W-C-150	150	160	129,5
PG-DL40W-M-175	175	198	126,5
PG-DL40W-B-175	175	198	126,5
PG-DL40W-C-175	175	198	126,5

INSTALLATION



TYPICAL PHOTOMETRIC CURVE

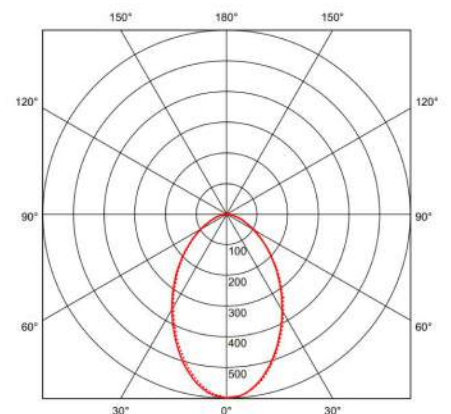

SPECIAL TRACK LIGHT




	PG-TRL40W-M	PG-TRL40W-B	PG-TRL40W-C
Power	40W	40W	40W
Equivalent Power	70W	70W	70W
Power Factor	> 0.90	> 0.90	> 0.90
LED Chip	Sharp	Sharp	Sharp
CCT (Range)	3000K	3000K	3000K
Luminous Flux	2900lm -3000lm	2900lm -3000lm	2900lm -3000lm
CRI (Ra)	90	96	90
Beam Angle	30°	30°	30°
IP	IP20	IP20	IP20
Possible Rotation	20°	20°	20°
Cover	Transparent	Transparent	Transparent
Frame	White	White	White
Ideal Installation For	Meat	Bread	Clothes

INSTALLATION

INSTALLATION

INSTALLATION

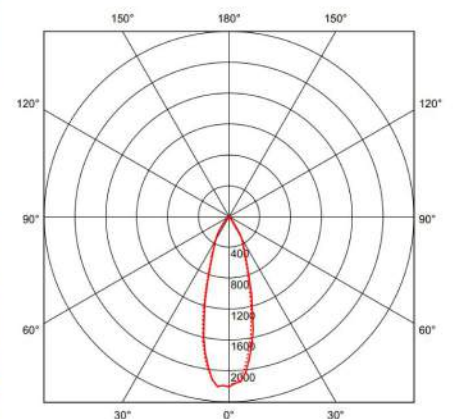

	Lenght(mm)
Track attach	263

	Lenght(mm)	Diameter (mm)	Height(mm)
Lamp Dim.	128,5	118	276